

B9600FXS
400-800 kVA
For data centers
Process industry
Infrastructure



BORRI

B9600FXS
400 to 800 kVA
Three phase On-line double
conversion Full IGBT technology
Paralleling up to 4.8 MVA

B9600FXS

400-800 kVA

For data centers
Process industry
Infrastructure



Features and benefits



- High double conversion efficiency and ECO mode for low running costs and environmental impact.
- Front access to all critical components for easy maintenance.
- Built-in inverter transformer for DC/AC galvanic protection of industrial type loads.
- Included backfeed bypass contactor for complete protection and operators' safety without additional installation costs.
- Hot connection/disconnection of parallel units for easy system resizing.
- Full IGBT technology and electronic PFC, ensuring 0.99 input PF and THDi<3% for maximum upstream sources compatibility.
- Accurate battery management providing ripple current minimization charge current/voltage control as per batteries manufacturers' specifications and automatic/manual battery test for maximum battery expected life preservation.
- Dynamic Charging Mode (DCM) for maximum versatility in long autonomy and low charging time applications.
- Smart parallel management in load sharing, load synchronization of single UPS systems and load synchronization of two paralleled systems for optimum protection.
- Dual DSP plus microcontroller logics for top performance and reliability.
- CAN-bus based distributed parallel control ensuring high load sharing accuracy and no single point of failure in parallel systems.
- Comprehensive set of communication options for total remote monitoring of equipment operation.
- Fully compliance with all international product standards for maximum quality guarantee.

Main options

- Manual bypass in extended cabinet
- Backfeed protection
- Bypass isolation transformer.
- Transformers/autotransformers for voltage adjustment.
- Battery voltage temperature compensation.
- External maintenance bypass wall-mounted box.
- Battery fuse switch wall-mounted box.
- Associated battery cabinets for long autonomy times.
- Parallel kit for load sharing.
- Load-sync for single UPS units.
- Load-sync box for two set of paralleled UPS.
- Top cable entry.

Dynamic Charging Mode (DCM)

The battery charging current can be set above the nominal, up to the DCM limit, in order to manage high capacity battery packs. The extra charging power is fed to the battery, as long as the load does not requires it. This is a firmware enabled feature.

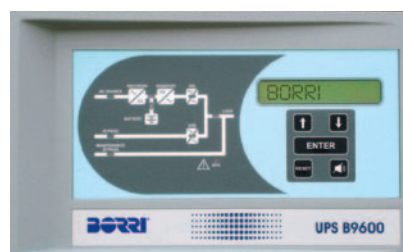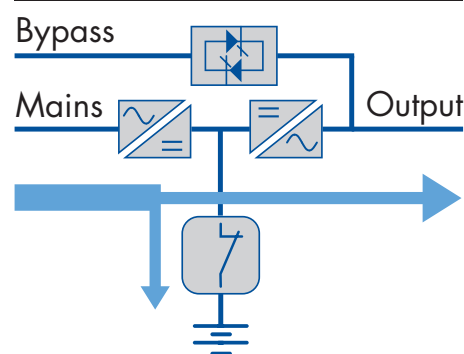

B9600FXS technical data

Rating (kVA)	400	500	600	800
Nominal power (kW)	360	450	540	720
Dimensions WxHxD (mm)	1990x990x1920	2440x990x2020	2440x990x2020	3640x990x1920
UPS weight (kg)	1820	2220	2400	3600
Battery configuration	External, 300±312 cells, VRLA (other options)			

Input

Connection type	Hardwired 3w (rectifier), 4w (bypass)
Nominal voltage	400 Vac 3-phase (rectifier) 380/400/415 Vac 3-phase with neutral (bypass)
Voltage tolerance	-20%, +15%
Frequency and range	50/60 Hz, 45±65 Hz
Power factor	0.99
Current distortion (THDi)	<3%

Output

Connection type	Hardwired 4w
Nominal voltage	380/400/415 Vac 3-phase with neutral
Frequency	50/60 Hz
Voltage regulation	±1% static; dynamic: IEC/EN 62040-3 Class 1
Power factor	up to 0.9, lagging or leading without power derating
Overload capacity	Inverter: 101±125% for 10 min, 126±150% for 1 min, 151±199% for 10 s, 200% for 100 ms; bypass: 150% continuous, 1000% for 1 cycle
Efficiency (AC/AC)*	up to 98%
Classification as per IEC/EN 62040-3	VFI-SS-111

Connectivity and function extensions

Front panel	Graphic display, mimic LED panel and keyboard, local EPO
Remote communication	Included: serial RS232 and USB; input terminal block for: remote emergency power off (REPO), battery circuit breaker aux. cont., external maintenance bypass circuit breaker aux. cont., diesel mode aux. contact. Optional: SNMP adapter (Ethernet), Web interface (Ethernet), ModBus-TCP/IP (Ethernet); ModBus-RTU (RS485); ModBus-RTU to PROFIBUS DP adapter; SPDT contact relay board; remote system monitoring panel; UPS managing and server shutdown software
Optional function extensions	Isolation transformer; transformers/autotransformers for voltage adjustment; external maintenance bypass; custom battery cabinets; wall-mounted battery fuse switch box; battery thermal probe; parallel kit; top cable entry; load-sync for single UPS and load-sync box (2 UPS systems)

System

Protection degree	IP 20 (other options)
Colour	RAL 7016 (other options)
Installation layout	Wall, back to back and side by side installation allowed
Accessibility	Front and top access, bottom cable entry

*certified by TÜV NORD according to IEC/EN 62040-3

Other features

Environmental

Operating temperature range	0°C ÷ +40°C
Storage temperature range	-10°C ÷ +70°C
Altitude (AMSL)	< 1000 m without power reduction, > 1000 with reduction of 0.5% per 100 m
Audible noise at 1m (dBA)	<62

Standards and certifications

Quality assurance, environment, health and safety	ISO 9001:2008, ISO 14001:2004, BS OHSAS 18001:2007
Safety	IEC/EN 62040-1
EMC	IEC/EN 62040-2
Environmental aspects	IEC/EN 62040-4
Test and performance	IEC/EN 62040-3
Protection degree	IEC 60529
Marking	CE

B9600FXS series options

	Description	When do I use it
	Parallel kit	When the unit is to be paralleled for load sharing
	Load-sync for single units	To synchronize single units' output for no-break load transfers by downstream static transfer switches
	Load-sync box for two sets of paralleled UPS	To synchronize the output of two paralleled UPS systems for no-break load transfers by downstream static transfer switches
	Backfeed protection bypass contactor	To be fully protected against backfeed energy upon static bypass failure
	Top cable entry (in extended cabinet) Maintenance bypass (in extended cabinet)	To allow input and output cable entry from the top of the unit. B9600FXS series feature optional maintenance bypass for cost reduction when this is externally provided
	Bypass isolation transformer (in extended cabinet)	To galvanically isolate UPS from load or to change system's earth arrangement
	Battery fused switch box	To disconnect and protect an external battery pack (wall mounted box)
	Battery temperature probe	For charging voltage compensation with temperature (10 m cable length))
	Dry contact relay card	To send UPS status to PLC's, SCADA's or AS400's by voltage free SPDT contacts
	Remote monitoring panel	To monitor UPS status by a LED panel from a remote control room
	RS485 ModBus-RTU port	To send UPS status to BMS's by RS485 connection and ModBus-RTU protocol. For telemonitoring and teleservice
	Web/SNMP Adapter	To send UPS status to BMS's by Ethernet connection and SNMP or ModBus over IP protocol. To monitor UPS status by any internet browser from workstations. To receive SMS or e-mail alerts from the UPS on any portable device
	Input terminal block for remote EPO	When the Emergency Power Off (EPO) has to be commanded by a remote control button
	Input terminal block for external manual bypass switch auxiliary contact	When there is an external maintenance bypass switch, for state monitoring
	Input terminal block for external battery switch auxiliary contact	When there is an external battery switch, for state monitoring
	Input terminal block for diesel mode contact	When battery recharge has to be inhibited over genset operation

INCLUDED