

GE.BD.220/200.SP+011

1500 rpm - Trifase - 50Hz - 400V



Standard equipment

Canopy Soundproofing

Removable soundproof canopy
Painting canopy (RAL) in galvanized sheet steel
Soundproofing with class 1 polyester material
Handles with key lock and automatic closing
Inspection doors for controls and maintenance
Inspection doors with hermetic gasket

Exhaust

Exhaust rain cap
Insulated exhaust pipes
Internal residential muffler

Fuel Supply

Single wall daily tank with bunded base
Automatic shutdown system for low fuel level
Fuel gauge

Handling

n.2 lifting hooks integrated into the bearing structure
Base frame with anti-overturning forklift pockets
Loadable side by side for truck transportation

Base Frame

Anti-vibrating mounting pads
Anti pollution Bunded base

Engine

Oil pressure and coolant temperature gauge (only with QPE or +14 variant)
Tropicalized radiator
Electronic speed governor

Alternator

AVR Automatic Voltage Regulator
Impregnation for marine environment
IP23

Panel & connection

Emergency Stop button
Tamperproof panel IP55
Cable output from side
IP44 wiring
Start-up battery (pre-charged)
Grounding point

Documentation

CE conformity declaration
User and Maintenance manual
Wirings diagrams

Normatives

All Generating sets are compliant to CE Marking
2014/30/UE Electromagnetic compatibility
2000/14/CE Noise Emission for outdoor use
Factory-designed systems built according to ISO 9001:2015
CEI EN 60204-1:2018 - Electrical equipment of machines

Primary data

General Information

Speed	RPM	1500
Frequency	Hz	50
PRP - Prime power	KVA	200
LTP - Standby power	KVA	220
PRP - Prime power	KW	160,0
LTP - Standby power	KW	176,0
Standard Voltage	V	400/230
Current	A	289,02
Voltage for current calculation	V	400
COSFI	0,8	0,8

General electrical protection

Rated current	A	320
Poles	N	3P
Optional/notes		Opening coil

Noise level +/- 3dB(A)

LWA	dB(A)	95
Sound pressure level @ 7 mt	dB(A)	70
Sound pressure level @ 1 mt	dB(A)	79

Fuel Consumption

TYPE		Diesel
Standard Fuel Tank capacity	lt	360
Autonomy @ 75% load	h	12
Fuel consumption at 100% load	lt/h	43,1
Fuel consumption at 75% load	lt/h	32,4
Fuel consumption at 50% load	lt/h	22,4

General data

Rated capacity	Ah	2x120
Auxiliary Voltage	V	24
Exhaust gas temperature	°C	<600
Exhaust gas flow	l/s	600,3
Combustion air flow	l/s	220
Cooling fan airflow	mc/s	6,9
Exhaust diameter	mm	0

Weight and Dimensions

Dimensions (L x W x H)	cm	330x140x166
Weight with liquids (excluding optionals and fuel)	Kg (+/-3%)	2483

Engine

Factory		Baudouin
Model		6M16G2D0/S
Emissions stage		Stage 0
Speed governor		Electronic
Radiator	°C	50
Cooling	Tipo	liquid (water + 50% Paraflu11)
Active net power	Kwm	174,4
Nominal net power	CV	237
Cycle	Tipo	4 strokes
Injection	Tipo	Direct
Aspiration	Tipo	Turbo
Numbers of cylinders	N	6
Cylinders arrangement		L
Bore	mm	126
Stroke	mm	130
Total displacement	lt	9,726
Engine oil features		15W40-API CI-4/CH-4 ACEA E5-E7
Engine oil consumption	%	<0,2
Total oil capacity	lt	22
Total coolant capacity	lt	42
ISO 8528-5 class		G2

Alternator


*** May vary based on stock availability. However, a primary brand will be used.**

Factory		MeccAlte
Model		ECO38 2S 4
PRP continuous power	KVA	200
Voltage Regulator (voltage accuracy)	+/- %	1
Poles	N°	4
Phases	N°	3+N
Standard windings connection		Star Series
Stator/rotor impregnation		H (Outdoor Temp 40°C)
Efficiency	%	92,7
Engine coupling		Elastic disk
Short circuit current		>= 300% (3In)
Protection degree	IP	23
Cooling system		Self ventilating
Maxium overspeed	rpm	2250
Waveform distortion	%	<3
Exciter		Ponte a diodi - MAUX

Environmental conditions

Ambient temperature	°C	40
Relative Humidity	%	60
Max altitude	mt	1000

Control Systems on board QBM-SP-AMF25-02

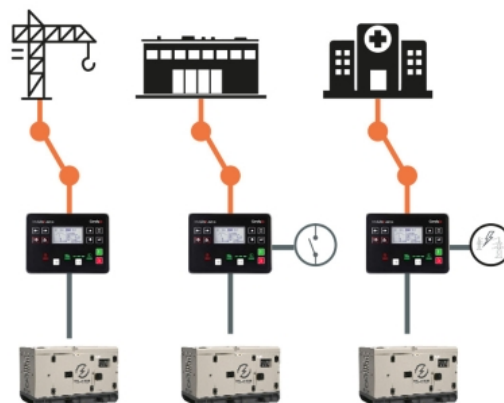

Operating scheme - Schema di funzionamento

QBM

Mechanical features

Protection degree	<i>IP</i>	55
-------------------	-----------	-----------

Battery charger

Model		LINDRAND - BTC2006A
Maximum output current	<i>A</i>	6 (12Vdc) - 3 (24Vdc)
Output DC voltage (selectable)	<i>Vdc</i>	12-24
Input AC voltage (selectable)	<i>Vac</i>	100-300
Frequency	<i>Hz</i>	50-60

Remotable functions in terminal box

GS start	Genset contactor close/open command (1)
Mains contactor close/open command (2)	

Control Module



Specifics

Applications

Emergency to the Mains
Stand-alone
Construction site/Rental
Self-production

ENGINE MEASURES

Fuel tank level %
Engine oil pressure BAR (1)
Engine Coolant temperature °C (1)
Total run time
Partial run time
Hours to maintenance
Battery voltage
Battery charging voltage
Start-ups counter
Engine speed
Engine speed (2)
Engine Oil temperature (2)
Cooler temperature (2)
Engine oil level (2)
Engine coolant level (2)
Engine coolant pressure (2)
Turbo pressure (2)
Fuel Consumption (2)

ALTERNATOR MEASURES

Generator Voltage L1, L2, L3
Generator Voltage L1-N, L2-N, L3-N
Generator frequency
Generator current L1
Generator current L1, L2, L3
Generator Apparent Power kVA
Generator Active Power kW
Generator Reactive Power kVAR
Generator accumulated power kWh
Power factor Cosfi

MAINS MEASURES

Mains voltage L1, L2, L3
Mains voltage L1-N, L2-N, L3-N
Mains frequency

COMMUNICATION PORTS

Can-bus port
Configurable via PC using USB port

EQUIPMENT

Microprocessor Logic
Back-lit display
Programmable by PC software
250 event log
Multiple display languages
STOP button
START button
AUT mode button
MAN mode button
OFF mode button
Reset alarm button
Alarm mute button
Transfer to Mains button
Transfer to generator button

PRE-ALARMS/ ALARMS

Common Alarm
Fuel reserve (pre-alarm)
Low fuel level (alarm)
Tank overflow
Charge alternator failed (dinamo)
Low oil pressure (pre-alarm) (1)
Low oil pressure (alarm)
Oil sensor failed (alarm)
High coolant temperature (pre-alarm) (1)
High coolant temperature (alarm)
Low coolant temperature (pre-alarm)
Low water level (1)
Water in fuel (1)
Battery undervoltage
Battery overvoltage
GS failure to start
GS failure to stop
Can-bus Failure
No Can-bus communication
Genset overload L1, L2, L3 phases
Genset short circuit
Genset overvoltage
Genset undervoltage
Genset high frequency
Genset low frequency
overspeed
Reverse power
Maintenance request
Emergency button pressed
Remote emergency active
Fuel theft
Genset negative phase sequence
Mains negative phase sequence
Fuel theft protection

Model	AMF25
Operating mode	AMF - MRS

VISUALIZATIONS ON CONTROL MODULE/DISPLAY

Pre-alarms
Alarms
Engine measures
Alternator measures
Mains measures
Date and time
Operating mode
Genset status
Mains status
Mains contactor status
Genset contactor status
Digital Input and Output status

CONTROL MODULE FUNCTIONS

Automatic start and stop when the Mains Fails (7)
Manual Start and stop
Emergency stop button on panel board
Remote emergency stop
Remote lock
Scheduled start-ups
MODBUS commands (Start, Stop, Reset, Test)
Scada available with PC connected to the controller
PLC editor
Manual switching commands

CONTROL MODULE SPECIAL FUNCTIONS (on demand)

Dummy load (4)
Load shedding (4)
Idle mode
Master / Slave mode

OPTIONAL

Fuel Supply



O.G-ACO-AT-C3V-02

External fuel tank connections with 3-way valve for supply from internal or external tank (130/700 kVA)



O.G-ACO-AT-C3V-AR-02

Quick coupling connectors with 3-way valve for internal or external fuel tank connection (130/700 kVA)



O.G-ACO-AT-CI-02

External tank connections for supply only from external tank (g without tank) GE 130/700



O.G-ACO-ST-BG-ES1

"Easy" automatic fuel refilling system on board, controlled by QPE-C and QLE-B panels

Batteries



O.G-BAT-BAE-03

Maintenance free high efficiency starter batteries (130/250 kVA)

Tanks

O.CI-DP-01-OR-EST-EU

Double wall fuel tank 1.000 Lt for external use Certified EN 12285-2 with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø100 x 173 x 140H - 610 kg. Walking pace Ø 75 cm.

O.CI-DP-01-OR-EST-NC

1000 lt. DOUBLE WALL FUEL TANK FOR OUTDOOR use with pull-off valve supplied loose RAL7030 grey dim.: Ø100x173x140(h) weight 400 kg -manhole Ø 54 cm.

O.CI-DP-01-OR-INT-EU

Tank 1000 lt DOUBLE WALL FOR INTERRO Certified EN 12285-1 with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø100x173x124(h) cm - weight 540 kg -manhole Ø 75 cm -anti-spreading well 100x100x25cm

O.CI-DP-01-OR-INT-NC

Tank 1000 lt DOUBLE WALL FOR INTERRO with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø100x173x124(h) cm - weight 399 kg -manhole Ø 54 cm -anti-spreading well 80x80x20(h) cm

O.CI-DP-015-OR-EST-EU

Double wall fuel tank 1500 lt to be filled in Certified EN 12285-1 with hook and loop valve supplied loose Standard colour grey RAL7030. dim.: Ø130x155x170(h) cm - weight 750 kg - manhole Ø 75 cm

O.CI-DP-015-OR-EST-NC

Double wall fuel tank 1500 lt fo external use with hook and loop valve supplied loose Standard colour grey RAL7030. dim.: Ø130x155x170(h) cm - weight 490 kg -manhole Ø 54 cm

O.CI-DP-015-OR-INT-EU

Double wall fuel tank 1500 lt to be filled in certified EN 12285-1 with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø130x155x155(h) cm - weight 670 kg -manhole Ø 75 cm -anti-spreading well 100x100x25cm

O.CI-DP-015-OR-INT-NC

Double wall fuel tank 1000 lt to be filled in with hook and loop valve supplied loose - black two-component epoxy catrame Standard colour grey RAL7030. dim.: Ø130x155x155(h) cm - weight 485 kg -manhole Ø 54 cm -anti-spreading well 80x80x20(h) cm

O.CI-DP-02-OR-EST-EU

Double wall fuel tank 2.000 Lt for external use Certified EN 12285-2 with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø130 x 180 x 172H - weight 810 kg. -manhole Ø 75 cm.

O.CI-DP-02-OR-EST-NC

Double wall fuel tank 2.000 Lt for external use with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø130 x 180 x 172H - weight 540 kg. -manhole Ø 54 cm.

O.CI-DP-02-OR-INT-EU

Double wall fuel tank 2000 lt to be filled in certified EN 12285-1 with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø130x180x155(h) cm - weight 730 kg -manhole Ø 75 cm -anti-spreading well 100x100x25cm

O.CI-DP-02-OR-INT-NC	Double wall fuel tank 2000 Lt to be filled in with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø130x180x155(h) cm - weight 535 kg -manhole Ø 54 cm -anti-spreading well 80x80x20(h) cm
O.CI-DP-03-OR-EST-EU	Double wall fuel tank 3000 Lt for external use Certified EN 12285-2 with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø150 x 215 x 195H - weight 1095 kg. -manhole Ø 75 cm.
O.CI-DP-03-OR-EST-NC	Double wall fuel tank 3.000 Lt for external use with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø150 x 215 x 195H - weight 770 kg. -manhole Ø 54 cm.
O.CI-DP-03-OR-INT-EU	Double wall fuel tank 3000 Lt to be filled in certified EN 12285-1 with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø150x215x174(h) cm - weight 920 kg -manhole Ø 75 cm -anti-spreading well 100x100x25cm
O.CI-DP-03-OR-INT-NC	Double wall fuel tank 1000 Lt to be filled in with hook and loop valve supplied loose - black two-component epoxy catrame Standard colour grey RAL7030. dim.: Ø150x215x174(h) cm - weight 768 kg -manhole Ø 54 cm -anti-spreading well 80x80x20(h) cm
O.CI-DP-04-OR-EST-EU	Double wall fuel tank 4.000 Lt for external use Certified EN 12285-2 with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø150 x 284 x 195H - weight 973 kg. -manhole Ø 54 cm.
O.CI-DP-04-OR-EST-NC	Double wall fuel tank 4.000 Lt for external use with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø150 x 284 x 195H - weight 973 kg. -manhole Ø 54 cm.
O.CI-DP-04-OR-INT-EU	Double wall fuel tank 4000 Lt to be filled in certified EN 12285-1 with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø150x284x174(h) cm - weight 1140 kg -manhole Ø 75 cm -anti-spreading well 100x100x25cm
O.CI-DP-04-OR-INT-NC	Double wall fuel tank 4000 Lt to be filled in with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø150x284x174(h) cm - weight 963 kg -manhole Ø 54 cm -anti-spreading well 80x80x20(h) cm
O.CI-DP-05-OR-EST-EU	Double wall fuel tank 5.000 Lt for external use Certified EN 12285-2 with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø150 x 332 x 195H - weight 1375 kg. -manhole Ø 75 cm.
O.CI-DP-05-OR-EST-NC	Double wall fuel tank 1.000 Lt for external use with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø150 x 332 x 195H - weight 1100 kg. -manhole Ø 54 cm.
O.CI-DP-05-OR-INT-EU	Double wall fuel tank 5000 Lt to be filled in certified EN 12285-1 with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø150x332x174(h) cm - weight 1430 kg -manhole Ø 75 cm -anti-spreading well 100x100x25cm
O.CI-DP-05-OR-INT-NC	Double wall fuel tank 5000 Lt to be filled in with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø150x332x174(h) cm - weight 1088 kg -manhole Ø 54 cm -anti-spreading well 80x80x20(h) cm
O.CI-DP-06-OR-EST-EU	Double wall fuel tank 6.000 Lt for external use Certified EN 12285-2 with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø165 x 334 x 210H - weight 1595 kg. -manhole Ø 75 cm.
O.CI-DP-06-OR-EST-NC	Double wall fuel tank 6.000 Lt for external use with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø165 x 334 x 210H - weight 1390 kg. -manhole Ø 54 cm.
O.CI-DP-06-OR-INT-EU	Double wall fuel tank 1000 Lt to be filled in certified EN 12285-1 with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø165x334x189(h) cm - weight 1790 kg -manhole Ø 75 cm -anti-spreading well 100x100x25 cm
O.CI-DP-06-OR-INT-NC	Double wall fuel tank 6000 Lt to be filled in with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø165x334x189(h) cm - weight 1382 kg -manhole Ø 54 cm -anti-spreading well 80x80x20(h) cm
O.CI-DP-08-OR-EST-EU	Double wall fuel tank 8.000 Lt for external use Certified EN 12285-2 with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø185 x 342 x 230H - weight 2162 kg. -manhole Ø 75 cm
O.CI-DP-08-OR-EST-NC	Double wall fuel tank 8.000 Lt for external use with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø185 x 342 x 230H - weight 1650 kg. -manhole Ø 54 cm

O.CI-DP-08-OR-INT-EU	Double wall fuel tank 1000 lt to be filled in certified EN 12285-1 with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø185x342x209(h) cm - weight 2030 kg -manhole Ø 75 cm -anti-spreading well 100x100x25cm
O.CI-DP-08-OR-INT-NC	Double wall fuel tank 8000 lt to be filled in with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø185x342x209(h) cm - weight 1650 kg -manhole Ø 54 cm -anti-spreading well 80x80x20(h) cm
O.CI-DP-10-OR-EST-EU	Double wall fuel tank 10.000 Lt for external use Certified EN 12285-2 with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø205 x 348 x 255H - weight 2480 kg. -manhole Ø 75 cm
O.CI-DP-10-OR-EST-NC	Double wall fuel tank 10.000 Lt for external use with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø205 x 348 x 255H - weight 2045 kg. -manhole Ø 54 cm
O.CI-DP-10-OR-INT-EU	Double wall fuel tank 10000 lt to be filled in certified EN 12285-1 with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø205x348x229(h) cm - weight 2300 kg -manhole Ø 75 cm -anti-spreading well 100x100x25cm
O.CI-DP-10-OR-INT-NC	Double wall fuel tank 10000 lt to be filled in with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø205x348x229(h) cm - weight 2016 kg -manhole Ø 54 cm -anti-spreading well 80x80x20(h) cm
O.CI-DP-12-OR-EST-EU	Double wall fuel tank 12.000 Lt for external use Certified EN 12285-2 with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø205 x 404 x 255H - weight 3230 kg. -manhole Ø 75 cm
O.CI-DP-12-OR-EST-NC	Double wall fuel tank 12.000 Lt for external use with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø205 x 404 x 2250H - weight 2360 kg. -manhole Ø 54 cm
O.CI-DP-12-OR-INT-EU	Double wall fuel tank 12000 lt to be filled in certified EN 12285-1 with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø205x404x229(h) cm - weight 3050 kg -manhole Ø 75 cm -anti-spreading well 100x100x25cm
O.CI-DP-12-OR-INT-NC	Double wall fuel tank 12000 lt to be filled in with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø205x404x229(h) cm - weight 2316 kg -manhole Ø 54 cm -anti-spreading well 80x80x20(h) cm
O.CI-DP-15-OR-EST-EU	Double wall fuel tank 15.000 Lt for external use Certified EN 12285-2 with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø205 x 495 x 255H - weight 3350 kg -manhole Ø 75 cm
O.CI-DP-15-OR-EST-NC	Double wall fuel tank 15.000 Lt for external use with tear-off valve (supplied loose) Standard colour grey RAL7030. Dim.cm. Ø205 x 495 x 255H - weight 2780 kg. -manhole Ø 54 cm
O.CI-DP-15-OR-INT-EU	Double wall fuel tank 15000 lt to be filled in certified EN 12285-1 with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø205x495x229(h) cm - weight 3170 kg -manhole Ø 75 cm -anti-spreading well 100x100x25cm
O.CI-DP-15-OR-INT-NC	Double wall fuel tank 15000 lt to be filled in with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø05x495x229(h) cm - weight 2786 kg -manhole Ø 54 cm -anti-spreading well 80x80x20(h) cm
O.CI-DP-20-OR-EST-EU	Double wall fuel tank 20.000 Lt for external use Certified EN 12285-2 with tear-off valve (supplied loose) Standard colour grey RAL7030 Dim.cm. Ø205 x 645 x 255H - weight 3780 kg -manhole Ø 75 cm
O.CI-DP-20-OR-EST-NC	Double wall fuel tank 20.000 Lt for external use with tear-off valve (supplied loose) Standard colour grey RAL7030 Dim.cm. Ø205 x 645 x 2550H - weight 3450 kg -manhole Ø 54 cm
O.CI-DP-20-OR-INT-EU	Double wall fuel tank 20.000 lt to be filled in certified EN 12285-1 with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø205x645x229(h) cm - weight 3580 kg -manhole Ø 75 cm -anti-spreading well 100x100x25cm
O.CI-DP-20-OR-INT-NC	Double wall fuel tank 20.000 lt to be filled in with hook and loop valve supplied loose - black two-component epoxy catrame dim.: Ø205x645x229(h) cm - weight 3426 kg -manhole Ø 54 cm -anti-spreading well 80x80x20(h) cm



O.CI-MP-01 Single wall tank of 1000 lt.

O.CI-MP-01,5 Single wall tank of 1500 lt



O.CI-MP-02 Single wall tank of 2000 lt.



O.CI-MP-03 Single wall tank of 3000 lt.



O.CI-MP-04 Single wall tank of 4000 lt.



O.CI-MP-05 Single wall tank of 5000 lt.



O.CI-MP-06 Single wall tank of 6000 lt.



O.CI-MP-08 Single wall tank of 8000 lt



O.CI-MP-09 Single wall tank of 9000 lt.



O.CI-MP-10 Single wall tank of 10000 lt.

⚙️ Electrical on board

O.Q-QBM-COM-4G-GPS Module cellular modem 2G/3G/4G in combination with a GPS/GLONASS receiver per INTELILITE 4 AMF25, AMF8, IG200, IG500 G2 and IG1000

⚙️ Engine



O.G-MOT-FSA-6 Fuel/Water Separator Filter - for Gen Sets 180/250 kVA



O.G-MOT-K-40C-03 Engine liquids suitable for -40°C ambient temperature for Gen Sets 130/250 kVA



O.G-MOT-PO-02 Oil change pump for Gen Sets 130/700 kVA



O.G-MOT-SC-AC-EL-01B Engine pre-heater 230V with thermostat on board for Gen Sets from 130 to 500 KVA (PRO/RB)

⚙️ ATS Panels



QC2.0400A Separate ATS panel, ABB 400A motorized change-over (275 kVA 400V) Dim. 60 x 50 x 160 cm - 109 kg. (ex QC2.275)


QLTS.400A

Wall-mounted ATS switching panel 400A 4P (275 kVA 400V) Dim. 62x32xh80cm 50 kg

Exhaust

O.G-SCA-KS-100

Exhaust flex pipe for drainage (length 3 mt.)


O.G-SCA-PF-03

Spark arrestor for Gen Sets 130/250 kVA

External tanks

O.SER-SC-1000

1000 Lt. Tank with collection tank on the floor - 1835x1130x860 mm (l-lxh) - 380kg


O.SER-SC-120

120 Lt. Tank with collection tank on the floor - dim. 1060 x 290 x 970 mm (lu x lar x h) - 65 kg.


O.SER-SC-1500

1500 Lt fuel tank with collection base Dim. 224 x 66 x 167 cm - 530 kg.


O.SER-SC-350

350 Lt. Tank with collection tank on the floor - dim. 1340 x 610 x 830 mm (lu x la x h) - 170 kg.


O.SER-SC-500

500 Lt fuel tank with collection base Dim. 168 x 71 x 86 cm - 230 kg.


O.SER-ST-CA.1000

Automatic fuel refilling system 1.000 Lt with bunded base, controlled by QST2 complete with shut-off valve.


O.SER-ST-CA.120

Automatic fuel refilling system 120 Lt with bunded base, controlled by QST2 complete with shut-off valve.


O.SER-ST-CA.1500

Automatic fuel refilling system 1.500 Lt with bunded base, controlled by QST2 complete with shut-off valve.


O.SER-ST-CA.500

Automatic fuel refilling system 500 Lt with bunded base, controlled by QST2 complete with shut-off valve.

Test

MS.CP-LT-02

FAT - Factory Acceptance Test for single Gen Set from 130 to 400 kVA according to our standard procedures in Elcos factory (max 2 hours - max 4 people - max 1 hour of operation)


MS.CP-ST-02

FAT - Factory Acceptance Test for single Gen Set from 130 to 400 kVA according to our standard procedures in Elcos factory (max 4 hours - max 4 people - max 2 hour of operation)


MS.TV-ST-01

Vibration test on 10 points with certificate for single Gen Set from 10 to 250 kVA

 Vari**O.G-VAR-CAT-02**

Toolbox for ordinary maintenance.

PRP

Engines of this rating provide unlimited hours of usage in a variable load application. The average load factor should not exceed 70% of the engine's prime power rating with a maximum number of 500 operational hours at 100% prime power rating. An overload capability of 10% is available, however, is limited to a period of 1 in every 12 hours


LTP

Limited-time running power is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500h of operation per year with the maintenance intervals. The overload is not allowed.


Sheet:	SP-BDM-200	SILENT PRO	Exhaust side:	Left	Type:	STANDARD	Rev:	00	Last Update:	28-01-2025	Page 1/1
--------	------------	------------	---------------	------	-------	----------	------	----	--------------	------------	----------

OVERALL DIMENSIONS [mm]


REAR VIEW




LEFT SIDE VIEW

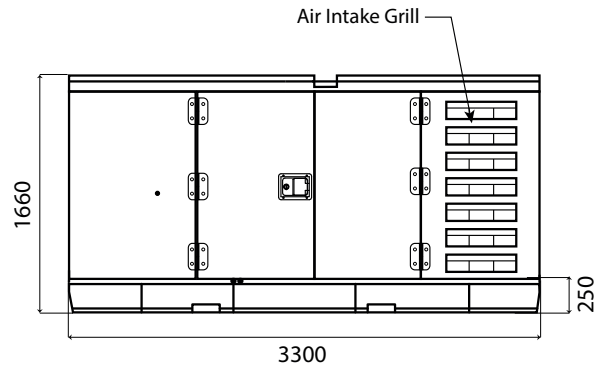


FRONT VIEW



RIGHT SIDE VIEW

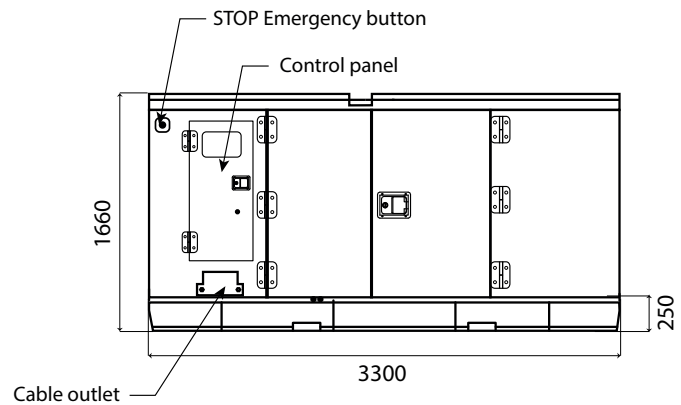

TOP VIEW

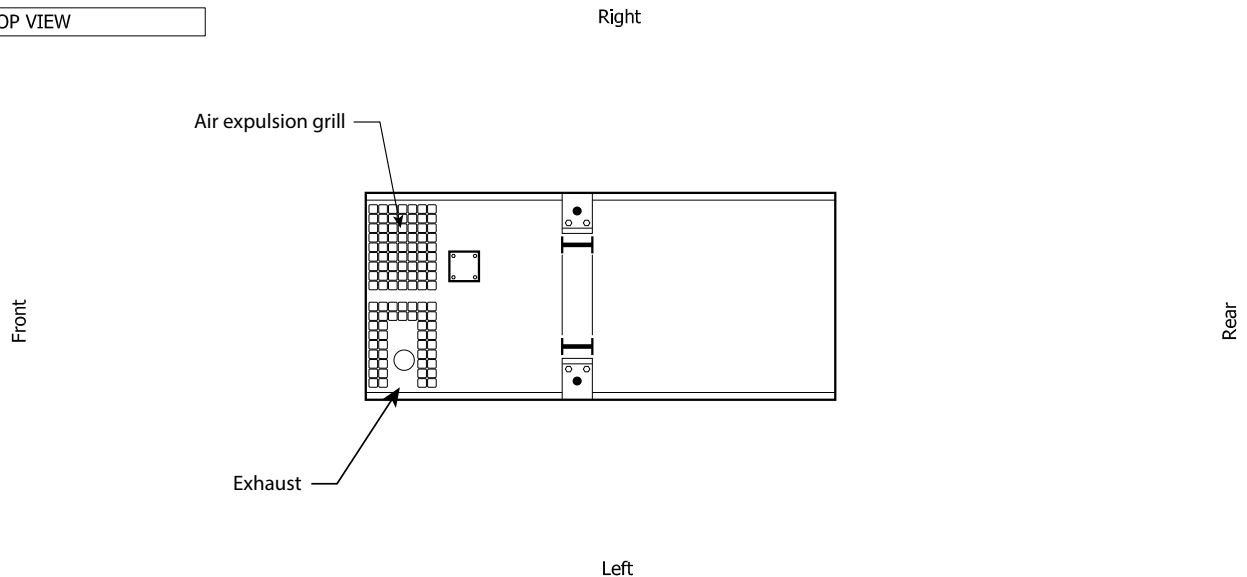

IMPORTANT:

- 1) Form and dimension refer to the generating set on catalogue
- 2) Form and dimension are subject to change in order to update or improve the products
- 3) This document can not be copied or transmitted without ELCOS S.r.l. approval