WX 6250 ES

Pramac portable generators range: prompt power assistance to light up, tackle site jobs and property improvement works.A complete range to choose from, for best solution to your remote power needs.When not fixing up around the job site, your Pramac portable generator can be used for emergency power during a power outage.

FEATURES

- OHV engine provides consistent power for multiple applications
- Fuel: Petrol
- Starting Systems: Electric (with battery)
- Low-oil level shutdown automatically safeguards engine from damage
- Engine oil for the first startup supplied in a bottle
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track gasoline levels
- Pratical quick user's Starting Instruction (decal)
- AVR Automatic Voltage Regulator
- Kit wheels integrated for easy transportation

PERFORMANCE		
Frequency	Hz	50
Voltage	V	400/230
Phase		3
Max Power	watt	6100
Rated Power	watt	5500

Single Phase Power

Voltage	V	230
Single Phase Max Power	watt	2000
Single Phase Rated Power	watt	1800

Engine		
Brand		Pramac
Type		OHV
Exhaust emission level		Stage V
Operating Speed Nominal	rpm	3000
Fuel		Petrol
Starting Systems		Electric (+Recoil)
Nr. of cylinder and disposition		1 inclination angle 25°
Oil capacity	l	1.1
Low Oil Shutdown		√

Alternator		
Protection	IP	23/44

Alternator Specifications	
Voltage regulation system	AVR

Dimensional data		
Length	(L) mm	800
Width	(W) mm	698
Height	(H) mm	620
Dry weight	kg	90
Carton box dimension LxWxH	mm	810x625x607

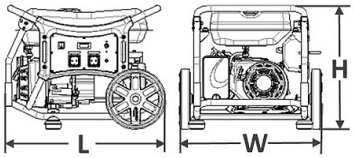

Autonomy		
Fuel tank capacity	l	26
Fuel consumption 50%	l/h	2.17
Running time 50%	h	12

Noise level		
Guaranteed noise level (LWA)	dB(A)	97

GENSET CONTROL PANELS

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

COMMANDS
- Selector switch: OFF - ON - START

INSTRUMENTATION
- Voltmeter
- Frequency meter
- Hourmeter
- Fuel gauge

PROTECTIONS
- Thermal protection
- Oil Guard

SOCKET TYPE

SCHUKO 230V 16A IP44	2
3P+N+T CEE 400V 16A IP44	1

The information is aligned with the Data file at the time of download.
Printed on 24/07/2026 (ID 10494)

©2026 | PR Industrial S.r.L – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc.| All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice