



Mobile Lighting Tower Suitable for Generator 4x1000 W Metal Halide - 9 mts


TC H 4x1000M.TL



*Indicative image. The floodlights will be different.

Technical data

Height	Mt ^s	9
Raising	Type	Hydraulic
Trolley	Type	Low Speed
Maximum Wind Speed	Km/H	105
Rotation	°	340
Floodlights	N° x W	4 x 1000
Lamps	Type	Metal Halide
Illuminated area	Sqm	4200

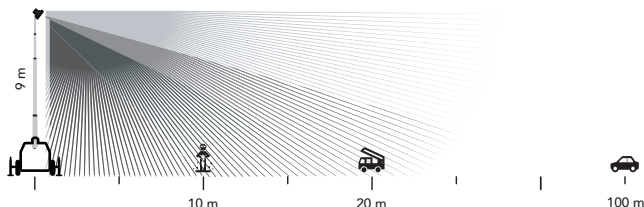

Minimum Dimensions (L x W x H)	Cm	-
Maximum Dimensions (L x W x H)	Cm	-
Dry weight	Kg	-

Engine

Suitable for GS	kVA	10-40
Model	Code	-
Frequency	Hz	-
Cooling	Type	-
Cylinders	N°	-
Consumption 75%	Lt ^s /H	-
Fuel	Type	-
Fuel Tank Capacity	Lt ^s	-
Runtime	H	-
Noise Level	dbA@7 mts	-

Alternator

Insulation	Class	-
Degree of protection	IP	-
Brand	Name	-
Rated Output	kVA	-

FEATURES

- MULTI-DIRECTIONALLY ADJUSTABLE AND TILTABLE FLOODLIGHTS
- GALVANIZED METALWORK
- 7 SECTIONS VERTICAL TOWER
- ELECTRICAL PROTECTION from overload and circuit breaker
- 4 HEIGHT ADJUSTABLE STABILIZERS, MANUAL DEPLOYMENT, GALVANIZED STEEL
- CONTROL PANEL ALARMS, FUEL LEVEL INDICATOR
- CENTRAL LIFTING EYE, LONGITUDINAL AND TRANSVERSAL FORKLIFT POCKETS FOR EFFECTIVE HANDLING
- ACTIVE AUTOMATIC BRAKING SYSTEM
- CABLE TO AVOID DAMAGE DURING TOWER OPERATION
- ON BOARD LEVELS for guidance during stabilization
- COMPACT DIMENSIONS for easy handling & transport

10 UNITS
PER TRUCK



APPLICATIONS



EVENTS



EMERGENCY



CONSTRUCTION



MILITARY



OIL & GAS



Environmental conditions

Temperature	°C	25
Relative humidity	%	30
Maximum altitude	Mt ^s	1000

