




## Mobile Lighting Tower With Generator 6x150 W LED - 9 mts

# TF H 6X150L.TV



### Technical data

Height	Mt <sup>s</sup>	9
Raising	Type	Hydraulic
Trolley	Type	Fast Speed
Maximum Wind Speed	Km/H	120
Rotation	°	340
Floodlights	N° x W	6 x 150
Lamps	Type	LED
Illuminated area	Sqm	3800

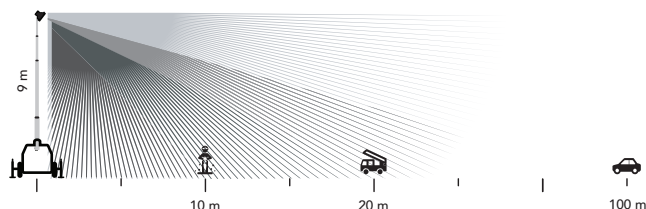

Minimum Dimensions (L x W x H)	Cm	240 x 140 x 245
Maximum Dimensions (L x W x H)	Cm	240 x 178 x 850
Dry weight	Kg	936

### Engine

Brand	Name	Kubota
Model	Code	Z482
Frequency	Hz	50
Cooling	Type	Liquid Cooled
Cylinders	N°	2
Consumption 75%	Lt <sup>s</sup> /H	0,55
Fuel	Type	Diesel
Fuel Tank Capacity	Lt <sup>s</sup>	110
Runtime	H	200
Noise Level	dbA@7 mts	65

### Alternator

Insulation	Class	H
Degree of protection	IP	IP21
Brand	Name	Linz
Rated Output	kVA	3,5

### FEATURES

- MULTI-DIRECTIONALLY ADJUSTABLE AND TILTABLE FLOODLIGHTS
- 48V POWER between the generator and the lights
- 7 SECTIONS HYDRAULIC VERTICAL TOWER
- GALVANIZED METALWORK
- ELECTRICAL PROTECTION from overload and circuit breaker
- 4 HEIGHT ADJUSTABLE STABILIZERS, MANUAL DEPLOYMENT, GALVANIZED STEEL
- EXTERNAL EMERGENCY STOP BUTTON
- IP67 LEVEL PROTECTION CERTIFIED
- CENTRAL LIFTING EYE & FORKLIFT POCKETS
- PLUG & PLAY, colour coded cables and connectors
- FULLY BUNDED TANK, 110%
- GUIDED MAIN COILED CABLE to avoid damage during operations
- CONTROL PANEL ALARMS, FUEL LEVEL INDICATOR
- ACTIVE AUTOMATIC BRAKING SYSTEM
- ON BOARD LEVELS for guidance during stabilization
- COMPACT DIMENSIONS for easy handling & transport

14 UNITS  
PER TRUCK



### APPLICATIONS



EVENTS



EMERGENCY



CONSTRUCTION



MILITARY



OIL &amp; GAS



### Environmental conditions

Temperature	°C	25
Relative humidity	%	30
Maximum altitude	Mt <sup>s</sup>	1000

