




Mobile Lighting Tower With Generator 4x1000 W Metal Halide - 9 mts

TF M 4X1000M.TL



Technical data

Height	Mt ^s	9
Raising	Type	Manual
Trolley	Type	Off road
Maximum Wind Speed	Km/H	110
Rotation	°	340
Floodlights	N° x W	4 x 1000
Lamps	Type	Metal Halide
Illuminated area	Sqm	4200

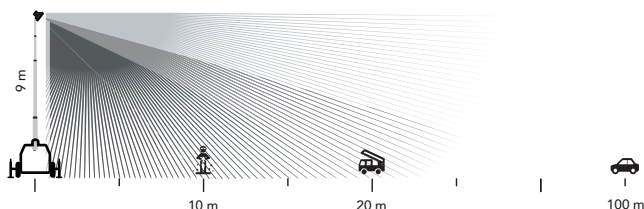

Minimum Dimensions (L x W x H)	Cm	256 x 135 x 255
Maximum Dimensions (L x W x H)	Cm	256 x 255 x 900
Dry weight	Kg	795

Engine

Brand	Name	Kubota
Model	Code	D-1105
Frequency	Hz	50
Cooling	Type	Liquid Cooled
Cylinders	N°	3
Consumption 75%	Lt ^s /H	1,85
Fuel	Type	Diesel
Fuel Tank Capacity	Lt ^s	80
Runtime	H	43
Noise Level	dbA@7 mts	64

Alternator

Insulation	Class	H
Degree of protection	IP	IP 23
Brand	Name	Linz
Rated Output	kVA	8

FEATURES

- MULTI-DIRECTIONALLY ADJUSTABLE AND TILTABLE FLOODLIGHTS
- 7 SECTIONS MANUALLY OPERATED VERTICAL TOWER
- GALVANIZED METALWORK
- ELECTRICAL PROTECTION from overload and circuit breaker
- 5 HEIGHT ADJUSTABLE STABILIZERS, MANUAL DEPLOYMENT, GALVANIZED STEEL
- EXTERNAL EMERGENCY STOP BUTTON
- CENTRAL LIFTING EYE & FORKLIFT POCKETS
- PLUG & PLAY, colour coded cables and connectors
- GUIDED MAIN COILED CABLE to avoid damage during operations
- CONTROL PANEL ALARMS, FUEL LEVEL INDICATOR
- COMPACT DIMENSIONS for easy handling & transport

10 UNITS
PER TRUCK



APPLICATIONS



EVENTS



EMERGENCY



CONSTRUCTION



MILITARY



OIL & GAS



Environmental conditions

Temperature	°C	25
Relative humidity	%	30
Maximum altitude	Mt ^s	1000

